



# 6m Telehandler




## MACHINE SPECIFICATION SHEET

### TH625

MAX LIFT HEIGHT	5.85m
OVERALL HEIGHT	1.92m
MAX FORWARD REACH	3.36m
GROUND CLEARANCE	0.33m
MAX LIFT CAPACITY	2,500kg
WHEELBASE	2.30m
TURNING RADIUS*	3.31m
LIFT CAPACITY FULL HT	2,500kg
LENGTH TO CARRIAGE	3.89m
REACH WITH Lt LOAD	3.36m
WEIGHT	4,710kg
OVERALL WIDTH*	1.81m

FEATURED MODEL	MANITOU MT-X 625H
----------------	-------------------

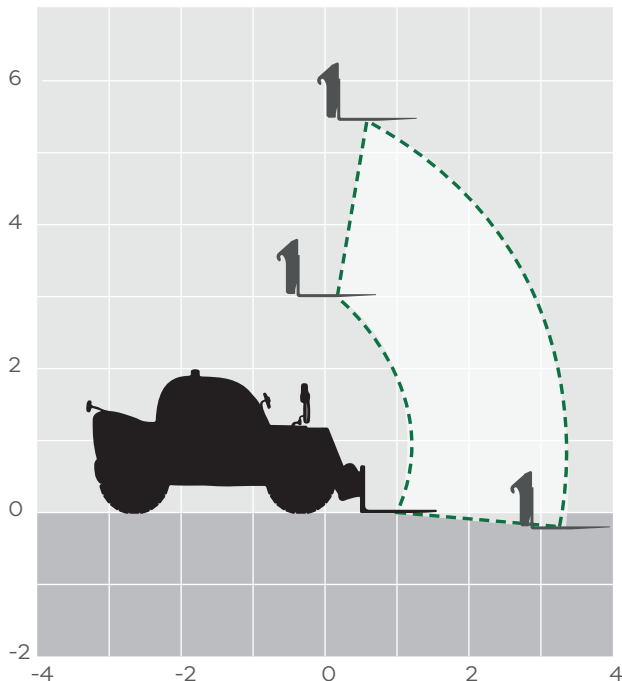

The MT-X 625H telehandler is specially designed for building sites and renovation projects involving lower heights. Its compact design means you can easily pass under thresholds and navigate congested areas. Its 3.3 m turning radius and 3 steering modes available provide you with excellent manoeuvrability. Easy to use, this handler features an ergonomic instrument panel to easily execute all machine functions in one control. Maintenance is made easy with the wide opening angle of the engine hood. Its gear pump is designed to allow simultaneous movement of the boom and telescope for increased productivity.

The information provided is for guidance only. It may change at any time in accordance with manufacturer's specification.

\*Over tyres - dependant upon tyre specified